Spec No.TQ3C-8EAF0-E1YAC67-00DateFebruary 28, 2013

TYPE : TCG121SVLQEPNN-AN20

< 12.1 inch SVGA transmissive color TFT with LED backlight>

CONTENTS

- 1. Application
- 2. Construction and outline
- 3. Mechanical specifications
- 4. Absolute maximum ratings
- 5. Electrical characteristics
- 6. Optical characteristics
- 7. Interface signals
- 8. Input timing characteristics
- 9. Lot number identification
- 10. Warranty
- 11. Precautions for use
- 12. Reliability test data
- 13. Outline drawing

Issued Date: Mar 25, 2013 KUDCERA Hayato LCD Division

KYOCERA CORPORATION SHIGA YASU PLANT LCD DIVISION

This specification is subject to change without notice. Consult Kyocera before ordering.

Issue DatePreparedCheckedApprovedCheckedApprovedFebruary 28, 2013R. Na kaoX. MoriM. Fuji TanjI. HamarZo, Auf	Γ	Original	Designed by: I	Engineering de	Confirmed by: QA dept.		
February 28, 2013 R. Nakao & Mori M. Fujitani I. Haman 26, Auf		Issue Date	Prepared	Checked	Approved	Checked	Approved
		February 28, 2013	R. Nakao	X. Mori	M.FyjiTanj	I. Kamars	Zo , Jul

SPEC

Spec No.	Part No.	Page
 TQ3C-8EAF0-E1YAC67-00	TCG121SVLQEPNN-AN20	-

Warning

- 1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
- 2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.



				e No.		Part			Page
			тq	3C-8EAF0-E1Y	AC67-00	Т	CG121SVLQEPN	JN-AN20	-
				vision 1		·d			<u> </u>
Date				Engineering			Confirmed by	∙∶QA dept.	
D	alt	Prepa	red	Checked	Appro	ved	Checked	Approve	d
						•			
Rev.No.	Date	Page			Des	cripti	ons		



Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAC67-00	TCG121SVLQEPNN-AN20	1

1. Application

This document defines the specification of TCG121SVLQEPNN-AN20. (RoHS Compliant)

2. Construction and outline

LCD	[:] Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Anti-Glare treatment
Interface	: LVDS
Additional circuit	: Timing controller, Power supply (3.3V input)
	: Constant current circuit for LED Backlight(12V input)

3. Mechanical specifications

Item	Specification	Unit
Outline dimensions 1)	265(W)×(207.7)(H)×9.6(D)	mm
Active area	246(W)×184.5(H) (30.8cm/12.1 inch(Diagonal))	mm
Dot format	800×(R,G,B)(W)×600(H)	dot
Dot pitch	0.1025(W)×0.3075(H)	mm
Base color 2)	Normally Black	-
Mass	670	g

1) Projection not included. Please refer to outline for details.

2) Due to the characteristics of the LCD material, the color varies with environmental temperature.



4. Absolute maximum ratings

	Item	Symbol	Min.	Max.	Unit
Supply volta	V_{DD}	-0.3	4.0	V	
Supply volta	ge(+12V)	$V_{\rm IN}$	-0.3	14.0	V
	RxINi+, RxINi- (i= 0,1,2,3)	V_{I1}	-0.3	2.8	V
Input signal voltage 1)	CK IN+, CK IN-	V_{I2}	-0.3	2.8	V
	SELLVDS	V _{I3}	-0.3	V_{DD} +0.5	V
	BLBRT, BLEN	V_{I4}	-0.3	$V_{\rm IN}$	V

4-1. Electrical absolute maximum ratings

1) V_{DD} must be supplied correctly within the range described in 5-1.

4-2. Environmental absolute maximum ratings

Item		Symbol	Min.	Max.	Unit
Operating temperature	1)	Тор	-20	70	°C
Storage temperature	2)	Тѕто	-30	80	°C
Operating humidity	3)	H _{OP}	10	4)	%RH
Storage humidity	3)	Hsto	10	4)	%RH
Vibration		-	5)	5)	-
Shock		-	6)	6)	-

- 1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.
- 2) Temp. = -30°C < 48h , Temp. = 80°C < 168h
 Store LCD at normal temperature/humidity. Keep them free from vibration and shock. An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard. (Please refer to "Precautions for Use" for details.)
- 3) Non-condensing
- 4) Temp. 40°C, 85%RH Max.

Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.

5)

Frequency	$10 \sim 55 \; \mathrm{Hz}$	Acceleration value
Vibration width	0.15mm	$(0.3 \sim 9 \text{ m/s}^2)$
Interval	10-55-10	Hz 1 minutes

2 hours in each direction X, Y, Z (6 hours total) EIAJ ED-2531


 6) Acceleration: 490 m/s², Pulse width: 11 ms 3 times in each direction: ±X, ±Y, ±Z EIAJ ED-2531

5. Electrical characteristics

5-1. LCD

						Temp. =	-20 ~ 70°C
Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	1)	V _{DD}	-	3.0	3.3	3.6	V
Current consumption		IDD	2)	-	290	370	mA
Permissive input ripple volt	age	$V_{\rm RP}$	V _{DD} =3.3V	-	-	100	mVp-p
T 4 . 1 14	0)	V _{IL}	"Low" level	0	-	0.8	V
Input signal voltage	3)	VIH	"High" level	2.0	-	V _{DD}	V
T 4 1 1 4		Iol	V _{I3} =0V	-10	-	10	μA
Input leak current		Іон	V ₁₃ =3.3V	-	-	400	μA
LVDS Input voltage	4)	VL	-	0	-	1.9	V
Differential input voltage	4)	V _{ID}	-	250	350	450	mV
Differential input threshold voltage 4) 5) Terminator		V _{TL}	"Low" level	V _{CM} -100	-	-	mV
		VTH	"High" level	-	-	V _{CM} +100	mV
		\mathbf{R}_1	-	-	100	-	
		t1	-	0.1	-	10	ms
		t2	-	0	-	-	ms
		t3	-	0	-	-	ms
V to the second of the second	1) (2)	t4	-	1.0	-	-	s
V_{DD} -turn-on conditions	1) 6)	t5	-	200		-	ms
		t6	-	200	-	-	ms
		t7	-	0	-	10	s
		t8	-	0	-	-	ms

¹⁾ V_{DD} -turn-on conditions

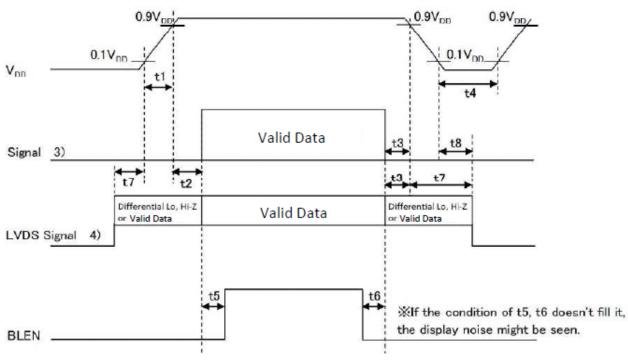




2) Display pattern:

```
V_{DD} = 3.3V, \text{Temp.} = 25^{\circ}\text{C}
1 \quad 2 \quad 3 \quad \cdots \quad \cdots \quad 2398 \ 2399 \ 2400 (\text{dot})
1
2
3
\vdots
599
600
(\text{dot})
```

- 3) Input signal : SELLVDS
- 4) Input signal : RxIN3+, RxIN3-, RxIN2+, RxIN2-, RxIN1+, RxIN1-, RxIN0+, RxIN0-CK IN+, CK IN-

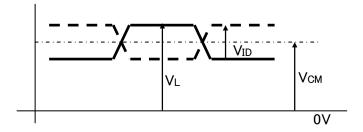


- 5) V_{CM} : LVDS Common mode voltage (V_{CM} =1.25V)
- 6) Please power on LVDS transmitter at the same time as VDD, or LVDS transmitter should be powered on first.

5-2. Constant current circuit for LED Backlight

	0			Te	mp. = -20 ~	70°C
Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply voltage 1)	$V_{\rm IN}$	-	10.8	12.0	13.2	V
Current consumption	$I_{\rm IN}$	2)	-	500	630	mA
Permissive input ripple voltage	$V_{\mathrm{RP}_\mathrm{BL}}$	$V_{IN}=12.0V$	-	-	100	mVp-p
DI DDT Is not sign al colta ra	VIL_BLBRT	"Low" level	0	-	0.8	V
BLBRT Input signal voltage	VIH_BLBRT	"High" level	2.3	-	$V_{\rm IN}$	V
BLBRT Input pull-down resistance	$R_{\rm IN_BLBRT}$	-	100	300	500	k
DI EN L	$V_{\rm IL_BLEN}$	"Low" level	0	-	0.8	V
BLEN Input signal voltage	VIH_BLEN	"High" level	2.3	-	$V_{\rm IN}$	V
BLEN Input pull-down resistance	$R_{\rm IN_BLEN}$	-	100	300	500	k
PWM Frequency 3)	fрwм	-	200	-	10k	Hz
		$f_{PWM}=200Hz$	1	-	100	%
P WM Duty ratio 3)	Dpwm	f _{PWM} =2kHz	10	-	100	%
		fpwm=10kHz	50	-	100	%
Operating life time 4), 5)	Т	Temp.=25°C	-	(70,000)	-	h


1) V_{IN} -turn-on conditions

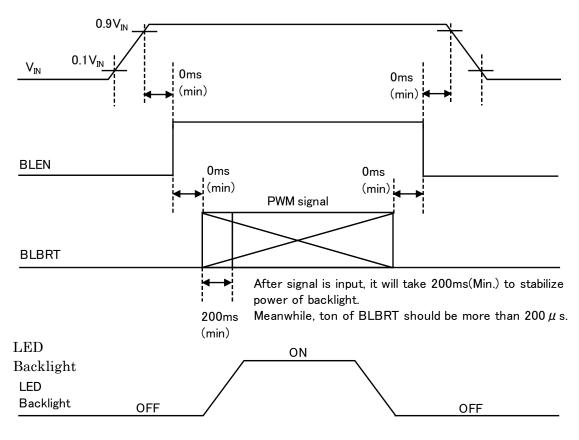

2) $V_{\rm IN}$ = 12V, Temp. = 25 $\,$, $D_{\rm PWM}$ = 100% $\,$



3) **PWM** Timing Diagram

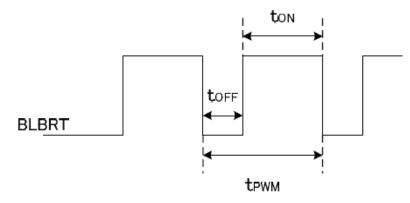

 $t_{\rm ON}$, $t_{\rm OFF}$ 50 μ s.

In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

- 4) When brightness decrease 50% of minimum brightness.The average life of a LED will decrease when the LCD is operating at higher temperatures.
- 5) Life time is estimated data.(Condition : IF=60mA, Ta=25 in chamber).



Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAC67-00	TCG121SVLQEPNN-AN20	7

6. Optical characteristics


Measuring spot = 6.0mm, Temp. = 25°C

r					suring spot	0.011111, 10	. 20 C
Item		Symbol	Condition	Min.	Typ.	Max.	Unit
December	Rise	τr	= =0°	-	18	-	ms
Response time	Down	τ _d	= =0°	-	12	-	ms
		UPPER		-	85	-	1
V [*]		LOWER	CR 10	-	85	-	deg.
Viewing angle	range	LEFT	CK 10	-	85	-	deg.
		ϕ right		-	85	-	
Contrast ratio		CR	= =0°	450	650	-	-
Brightness		L	IF=60mA/Line	(315)	(450)	-	cd/m^2
	Red	x	= =0°	0.550	0.600	0.650	
	Red	У		0.300	0.350	0.400	
	C	x	00	0.285	0.335	0.385	
Chromaticity	Green	У	= =0°	0.520	0.570	0.620	
coordinates	Dlass	x	= =0°	0.100	0.150	0.200	-
	Blue	У	0	0.070	0.120	0.170	
	White	x	= =0°	0.265	0.315	0.365	
	white	у	0	0.290	0.340	0.390	


6-1. Definition of contrast ratio

CR(Contrast ratio) = Brightness with all pixels "White" Brightness with all pixels "Black"


6-2. Definition of response time

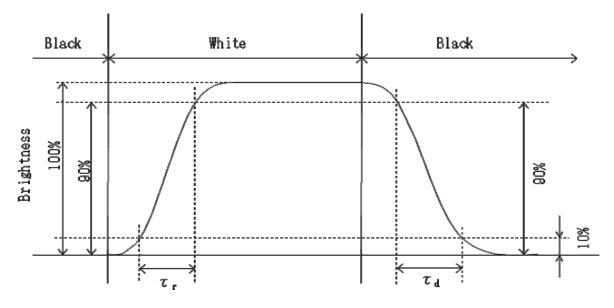

Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAC67-00	TCG121SVLQEPNN-AN20	8

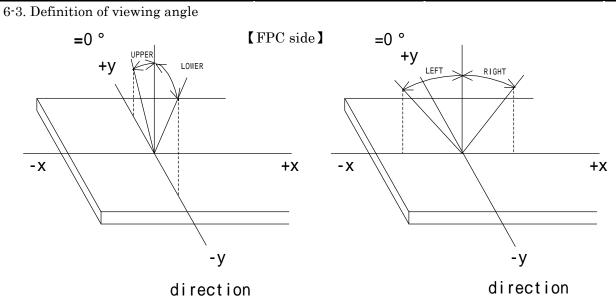

6-4. Brightness measuring points

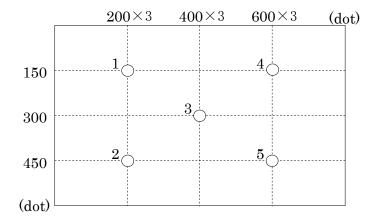

- 1) Rating is defined as the white brightness at center of display screen(3).
- 2) 5 minutes after LED is turned on. (Ambient Temp.=25)

7. Interface signals

7-1. Interface signals

No.	Symbol	Description	Note
1	GND	GND	
2	SELLVDS	Mode select signal(LVDS Data mapping)	
3	GND	GND	
4	GND	GND	
5	RxIN3+	LVDS receiver signal CH3(+)	LVDS
6	RxIN3-	LVDS receiver signal CH3(-)	LVDS
7	GND	GND	
8	CK IN+	LVDS receiver signal CK(+)	LVDS
9	CK IN-	LVDS receiver signal CK(-)	LVDS
10	GND	GND	
11	RxIN2+	LVDS receiver signal CH2(+)	LVDS
12	RxIN2-	LVDS receiver signal CH2(-)	LVDS
13	GND	GND	
14	RxIN1+	LVDS receiver signal CH1(+)	LVDS
15	RxIN1-	LVDS receiver signal CH1(-)	LVDS
16	GND	GND	
17	RxIN0+	LVDS receiver signal CH0(+)	LVDS
18	RxIN0-	LVDS receiver signal CH0(-)	LVDS
19	GND	GND	
20	GND	GND	
21	V _{DD}	+3.3V power supply	
22	V _{DD}	+3.3V power supply	
23	GND	GND	
24	BLBRT	PWM signal(Brightness adjustment)	
25	BLEN	ON/OFF terminal voltage	
26	GND	GND	
27	V _{IN}	+12V power supply	
28	V _{IN}	+12V power supply	
29	GND	GND	
30	GND	GND	

LCD connector	:	FI-X30SSLA-HF	(JAE)
Matching connector	:	FI-X30HL	(JAE)
	:	FI-X30HL-T	(JAE)
	:	FI-X30C2L-NPB	(JAE)
	:	FI-X30C2L-T-NPB	(JAE)
	:	FI-X30C2L-NPB	(JAE)

LVDS receiver	:	Embedded in ASIC
Matching LVDS transmitter	:	THC63LVDM83R(THine Electronics) or compatible




Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAC67-00	TCG121SVLQEPNN-AN20	10

7-2. Data mapping(6bit RGB input)

1	l) Location of	SELLVDS	(THC63LVDM83R(THine Electronics) or c	ompatible)
		• • •		

Transmitter		2Pin SF	ELLVDS
Pin No.	Data	= L(GND) or OPEN	= H(3.3V)
51	TA0	-	R0(LSB)
52	TA1	-	R1
54	TA2	-	R2
55	TA3	-	R3
56	TA4	-	R4
3	TA5	-	R5(MSB)
4	TA6	-	GO(LSB)
6	TB0	-	G1
7	TB1	-	G2
11	TB2	-	G3
12	TB3	-	G4
14	TB4	-	G5(MSB)
15	TB5	-	B0(LSB)
19	TB6	-	B1
20	TC0	-	B2
22	TC1	-	B3
23	TC2	-	B4
24	TC3	-	B5(MSB)
27	TC4	-	(HS)
28	TC5	-	(VS)
30	TC6	-	DE
50	TD0	-	GND
2	TD1	-	GND
8	TD2	-	GND
10	TD3	-	GND
16	TD4	-	GND
18	TD5	-	GND
25	TD6	-	GND

SELLVDS=H(3.3V)




DE : DATA ENABLE HS : H_{SYNC} VS : V_{SYNC}




2) Block Diagram

SELLVDS=H(3.3V)

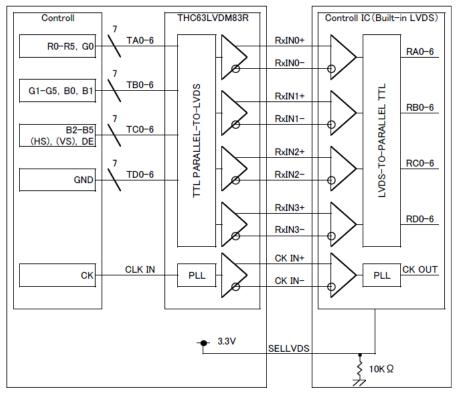

SELLVDS signal line has 10 k pulldown resister.

When using "6-bit Transmitter", please connect the unused channel of the control IC receiver as described in the diagram below.

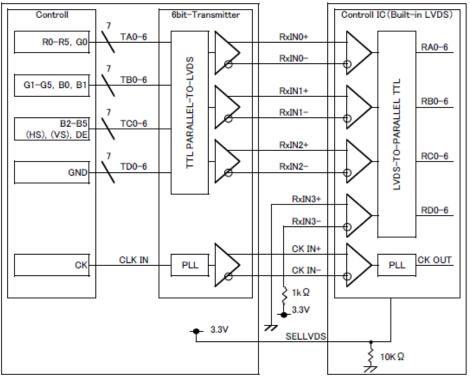

SELLVDS signal line has 10 k pulldown resister.




Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAC67-00	TCG121SVLQEPNN-AN20	12


7-3. Data mapping(8bit RGB input)

1) Location of SELLVDS	(THC63LVDM83R(THine Electronics) or co	mpatible)
	Π	OD' CELLVDC	

Transmitter		2Pin S	ELLVDS
Pin No.	Data	= L(GND) or OPEN	= H(3.3V)
51	TA0	R0(LSB)	R2
52	TA1	R1	R3
54	TA2	R2	R4
55	TA3	R3	R5
56	TA4	R4	R6
3	TA5	R5	R7(MSB)
4	TA6	G0(LSB)	G2
6	TB0	G1	G3
7	TB1	G2	G4
11	TB2	G3	G5
12	TB3	G4	G6
14	TB4	G5	G7(MSB)
15	TB5	B0(LSB)	B2
19	TB6	B1	B3
20	TCO	B2	B4
22	TC1	B3	B5
23	TC2	B4	B6
24	TC3	B5	B7(MSB)
27	TC4	(HS)	(HS)
28	TC5	(VS)	(VS)
30	TC6	DE	DE
50	TD0	R6	R0(LSB)
2	TD1	R7(MSB)	R1
8	TD2	G6	G0(LSB)
10	TD3	G7(MSB)	G1
16	TD4	B6	B0(LSB)
18	TD5	B7(MSB)	B1
25	TD6	(NA)	(NA)


SELLVDS=L(GND) or OPEN

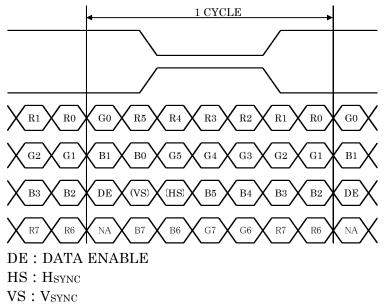

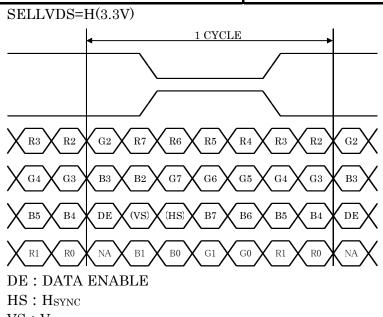

- VS : VSYNC
- 2) Block Diagram


SELLVDS=L(GND) or OPEN

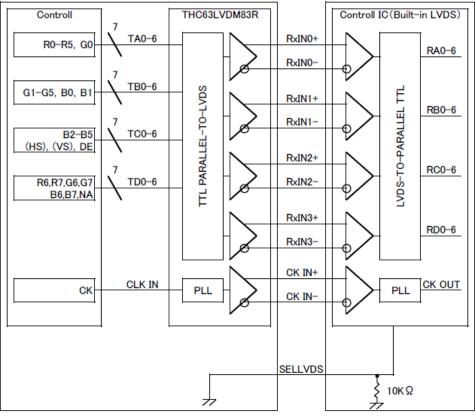

SELLVDS signal line has 10 k pulldown resister.



SELLVDS=H(3.3V)

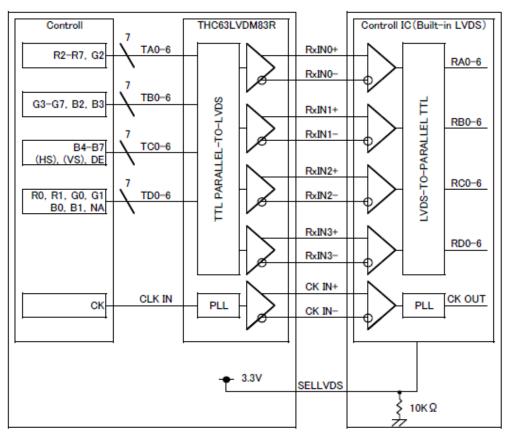

SELLVDS signal line has 10 k pulldown resister.

8. Input timing characteristics


8-1. Timing characteristics

	Item	Symbol	Min.	Тур.	Max.	Unit	Note
Clock (CK)	Frequency	1/Tc	30	40	48	MHz	
	Horizontal Dariad	Th	860	1056	1395	Тс	
	Horizontal Period		24.0	26.4	-	μs	1)
Enable signal (DE)	Horizontal display period	Thd		800		Тс	
	Vertical Period	Tv	610	628	1024	Th	
	Vertical display period	Tvd		600		Th	
Refresh rate		fv	50	60	70	Hz	2)


1) Please set a clock frequency, a vertical dormant period, and the horizontal dormant period so that the Horizontal Period should not reach less than Min. value.

2) If the refresh rate reach less than Min. value, the deterioration of the display quality, flicker etc., may occur.(fv=1/Tv)

Vertical Timing Diagram

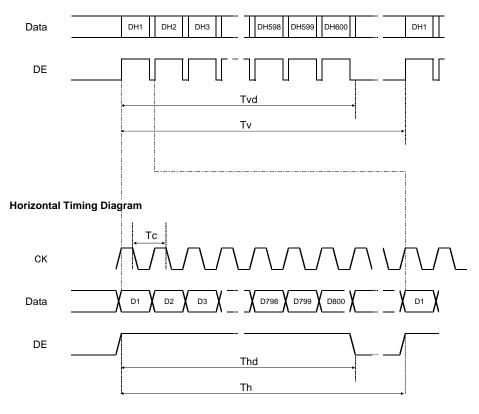

8-2. Input Data Signals and Display position on the screen

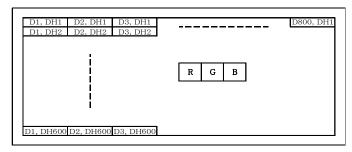



9. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

- No1. No5. above indicate
 - 1. Year code
 - 2. Month code
 - 3. Date
 - 4. Version Number
 - 5. Country of origin (Japan or China)

Year	2013	2014	2015	2016	2017	2018
Code	3	4	5	6	7	8

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	Х	Y	Z

10. Warranty

10-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

10-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.



11. Precautions for use

- 11-1. Installation of the LCD
- 1) Please ground either of the mounting (screw) holes located at each corner of an LCD, in order to stabilize brightness and display quality.
- 2) A transparent protection plate shall be added to protect the LCD and its polarizer.
- 3) The LCD shall be installed so that there is no pressure on the LSI chips.
- 4) Since this product is wide viewing product, occurrence level of in-plane unevenness by the external stress is different compared to current normal viewing product. So there is a possibility that in-plane unevenness will be occurred by over twist, strain giving by attaching to LCD, and over pressure to touch panel. Please be careful of stress when designing the housing.
- 5) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.

11-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

11-3. LCD operation

1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.

11-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified. Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

11-5. Usage

- 1) <u>DO NOT</u> store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) The front polarizer is easily scratched or damaged. Prevent touching it with any hard material, and from being pushed or rubbed.
- 3) The LCD screen may be cleaned by wiping the screen surface with a soft cloth or cotton pad using a little Ethanol.
- 4) Water may cause damage or discoloration of the polarizer. Clean condensation or moisture from any source immediately.
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not disassemble LCD because it will result in damage.
- 7) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 8) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.



12. Reliability test data

Test item	Test condition	Test time	Jud	gement
High temp. atmosphere	80°C	240h	Display function Display quality Current consumption	: No defect : No defect : No defect
Low temp. atmosphere	-30°C	240h	Display function Display quality Current consumption	: No defect : No defect : No defect
High temp. humidity atmosphere	40°C 90% RH	240h	Display function Display quality Current consumption	: No defect : No defect : No defect
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function Display quality Current consumption	: No defect : No defect : No defect
High temp. operation	70°C	500h	Display function Display quality Current consumption	: No defect : No defect : No defect


1) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.


2) The LCD is tested in circumstances in which there is no condensation.

3) The reliability test is not an out-going inspection.

 The result of the reliability test is for your reference purpose only. The reliability test is conducted only to examine the LCD's capability.



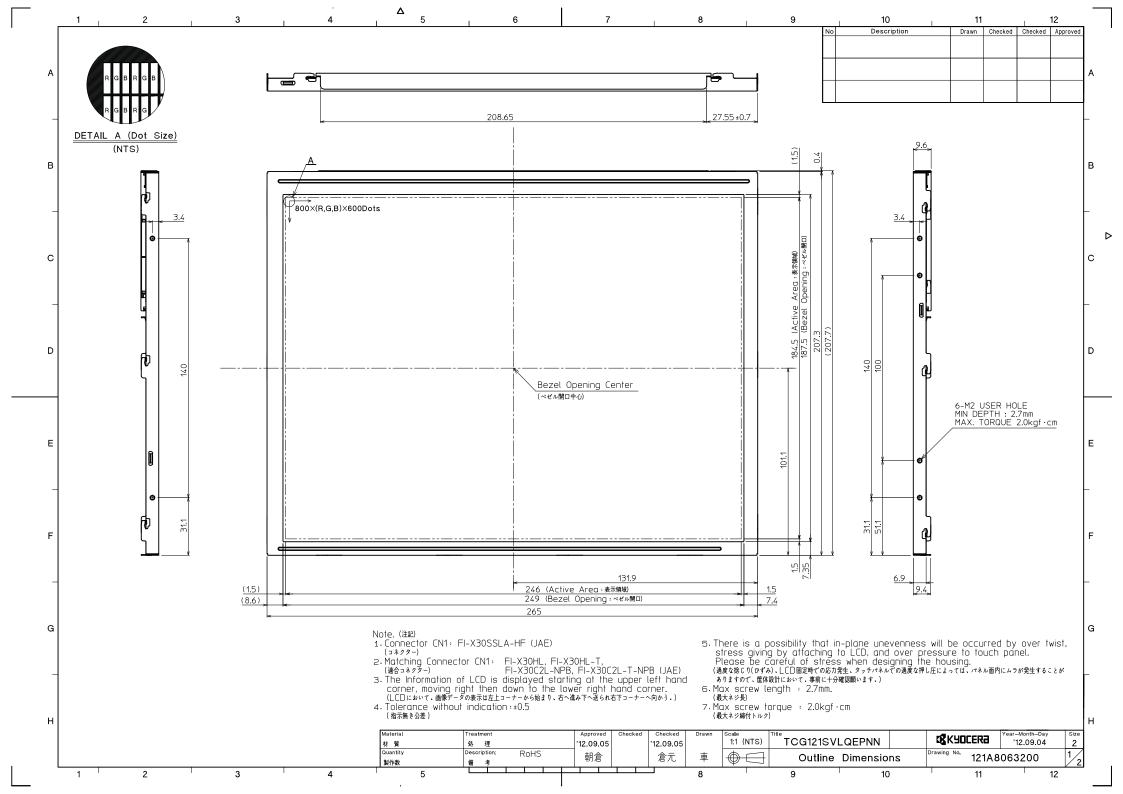

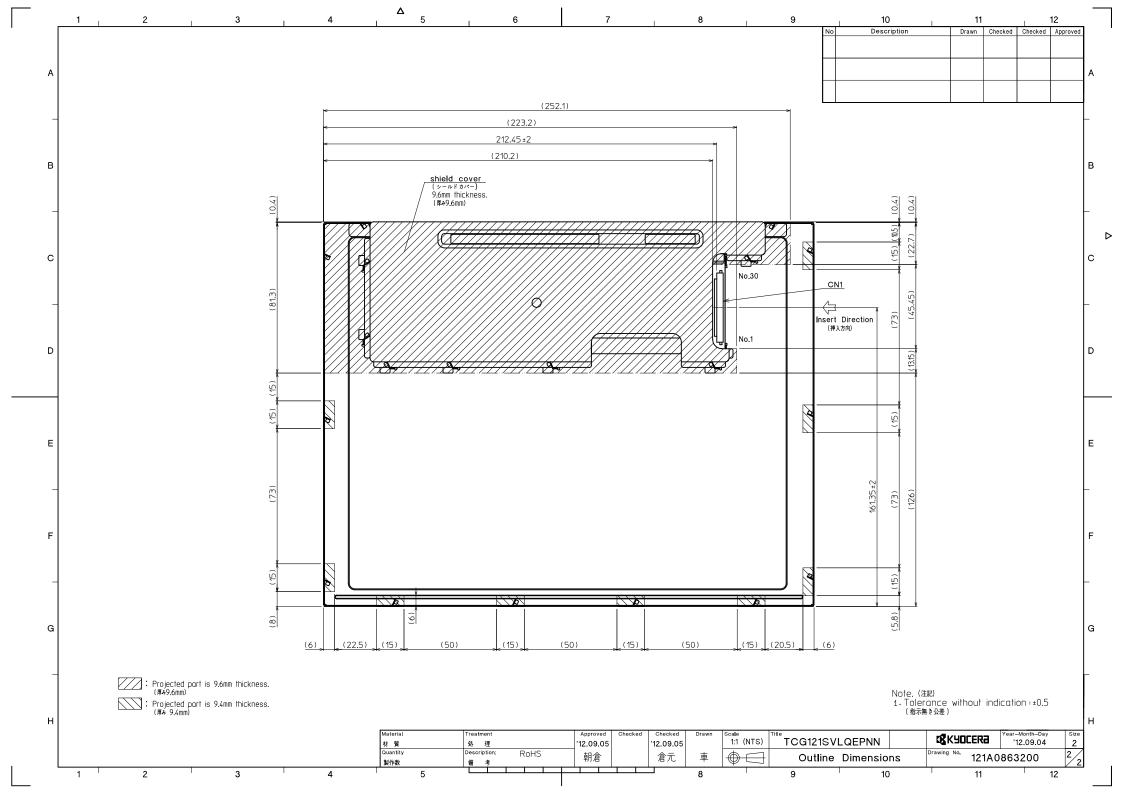

Spec No.	TQ3C-8EAF0-E2YAC67-00
Date	February 28, 2013

KYOCERA INSPECTION STANDARD

TYPE : TCG121SVLQEPNN-AN20

KYOCERA CORPORATION SHIGA YASU PLANT LCD DIVISION

Original	Designed by :	Engineering de	Confirmed by : QA dept.		
Issue Date	Prepared	Checked	Approved	Checked	Approved
February 28, 2013	R.Nakao	H. Mori	M.F.jiTanî	1. Hamar S	To , Jul

Revision record





				ec No. FQ3C-8EAF0-E2	YAC67-00		urt No. FCG121SVLQEP	NN-AN20	Рε
	Date	Designed b	oy:	Engineering d	lept.	1	Confirmed by	v: QA dept	
1	Prepared		Checked	Approve	d	Checked	Approv		
Rev.No.	Date	Page	Descriptions						
	Date	Tage			Deseri	i p t i	0115		

Visuals specification

1)	Note
-/	

1) Note			Note					
General	reviewe consent 2. This ins	reviewed by Kyocera, and an additional standard shall be determined by mutual consent.						
	3. Inspecti Lumina Inspect Temper	on conditions ince ion distance rature	: 500 Lux min. : 300 mm. : 25 ± 5					
Definition of inspection item	Direction Dot defect	Bright dot defect Black dot defect Adjacent dot	 Directly above The dot is constantly "on" when power applied to the LCD, even when all "Black" data sent to the screen. Inspection tool: 5% Transparency neutral density filter. Count dot: If the dot is visible through the filter. Don't count dot: If the dot is not visible through the filter. R G B R G B R G B R G B R G B R G B dot defect The dot is constantly "off" when power applied to the LCD, even when all "White" data sent to the screen. Adjacent dot defect is defined as two or more bright dot defects or black dot defects.					
	External inspection Definition of size	Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight) Appearance inspection Definition of d = (a +						



Spec No. TQ3C-8EAF0-E2YAC67-00

Page 2

2) Standard

Classif	ra fication	Inspect	ion item	Judgement standard				
Defect	Dot	Bright dot	defect	Acceptable number : 4		:4	4	
(in LCD	defect	_		Bright dot spacing		: 5 mm	: 5 mm or more	
glass)		Black dot defect		Acceptable number		: 5		
				Black dot spacing		: 5 mm	or more	
		2 dot join Bright dot defect		Acceptable number		:2		
			Black dot defect	Acceptable number		: 3		
		3 or more of	dots join	Acceptable number		:0		
		Total dot d	efects	Acceptable number		÷5 Max	X	
	Others	White dot,	Dark dot					
		(Circle)		Size (mm	n)	Ac	ceptable number	
				d	0.2		(Neglected)	
				0.2 < d	0.4		5	
				0.4 < d	0.5		3	
				0.5 < d			0	
External	inspection	Polarizer (Scratch)					
(Defect on	-			Width (mm)	Length (mm)	Acceptable number	
Polarizer				W 0.1	-	,	(Neglected)	
between H	Polarizer			0.1 < W 0.3	L	5.0	(Neglected)	
and LCD				0.1 < W 0.5	5.0 < L		0	
				0.3 < W -			0	
		Polarizer (Bubble)					
				Size (mm	n)	Ac	ceptable number	
				d 0.2		(Neglected)		
				0.2 < d	0.3		5	
				0.3 < d	0.5		3	
				0.5 < d			0	
		Foreign pa	rticle					
		(Circular	shape)	Size (mm)		Acceptable number		
				d 0.2		(Neglected)		
				0.2 < d 0.4		5		
				0.4 < d 0.5			3	
				0.5 < d			0	
		Foreign pa	rticle					
	(Linear shape)			Width (mm)	Length	(mm)	Acceptable number	
		Scratch		W 0.03			(Neglected)	
					L		(Neglected)	
				0.03 < W = 0.1	2.0 < L	4.0	3	
					4.0 < L		0	
				0.1 < W	-		(According to	
							circular shape)	

